


Multi-mode 50/125 OM3 Optical Fiber 3mm

Construction Detail

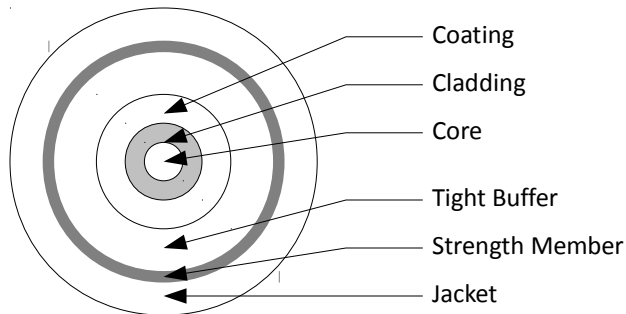

Description

For optical fiber transmission

Rated Temperature (°C)	-20 to +60
Flame Test	OFNR
Product Compliance	RoHS

Physical Construction

Inner Optical Fiber	Corning Glass
Core Dia. ($\pm 2.5\mu\text{m}$)	50
Cladding Dia. ($\pm 2.0\mu\text{m}$)	125
Coating Dia. ($\pm 5\mu\text{m}$)	245
Core-Cladding concentricity (μm)	≤ 1.5
Cladding non-circularity (%)	≤ 1.0
Coating-Cladding concentricity (μm)	≤ 5

Outer Optical Cable

Tight Buffer	PVC
Outer Dia. (mm)	0.9
Strength Member	Aramid (Kevlar)
Jacket	PVC
Outer Dia. (mm)	2.85

Colours

Jacket	Aqua
Sheath	White

Performance Characteristics

Typical Optical

Insertion Loss (dB)	≤ 0.3
Return Loss (dB)	≥ 45
Fiber Attenuation (dB/km@1300nm)	≤ 0.6
Fiber Attenuation (dB/km@850nm)	≤ 2.3
Cable Attenuation (dB/km@1300nm)	≤ 1.5
Cable Attenuation (dB/km@850nm)	≤ 3.5

Mechanical

Tensile Strength, Long-Term (N)	60
Tensile Strength, Short-Term (N)	100
Crush Resistance, Long-Term (N/100mm)	100
Crush Resistance, Short-Term (N/100mm)	500
Bend Radius, Dynamic (mm)	20xD
Bend Radius, Static (mm)	10xD
	(D: Cable Diameter)

Performance

Bandwidth (MHz.KM@850nm)	≥ 1500
Bandwidth (MHz.KM@1300nm)	≥ 500

Jacket Marking (black)

CORNING OPTICAL FIBER MM 50/125 OM3 [YYYY].[MM] 3.0mm
XXXX M

Where:
[MM] - Month
[YYYY] - Year
XXXX - Length in spool