


CAT6 SLIM UTP NETWORK PATCH CABLE (28AWG)



SKUS				
C6-S005	(0.5')	C6-S07	(7')	
C6-S001	(1')	C6-S10	(10')	
C6-S02	(2')	C6-S15	(15')	
C6-S03	(3')	C6-S20	(20')	
C6-S05	(5')	C6-S25	(25')	

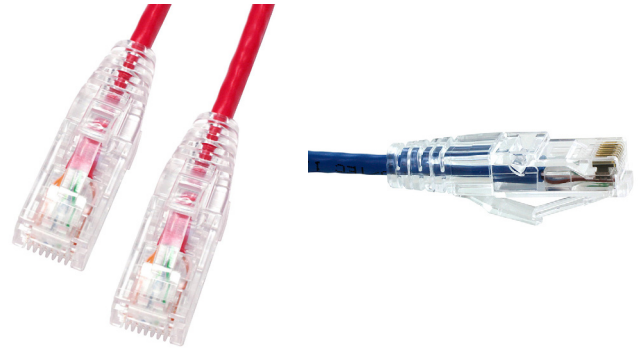

FEATURES

- High performance slim Cat6 28 AWG Ethernet patch cable is designed for high density environments
- 3.6mm outer diameter provides a slimmer profile for flexible routing
- Slimmer profile increases airflow for data centers or server rooms
- Snag-less molded design provides strain relief and protection while maximizing on bending radius
- 28AWG pure bare copper conductors
- 50u" gold plated contacts

AVAILABLE COLOURS

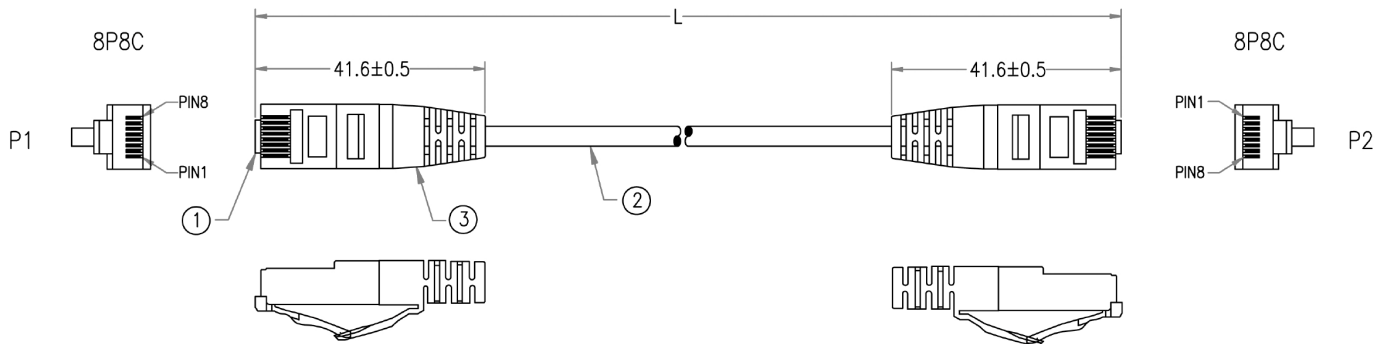

MATERIALS

JACK (1)	8P8C Modular plug, gold plating 50 Micro-inches on contacts
CABLE (2)	4 Twisted pairs mini Cat.6 28AWG UTP, OD 3.6mm, Jacket blue (UH-4)
BOOT (3)	8P8C Transparent Boot (OD 4.5mm)

SPECIFICATIONS

MEETS C6 EIA/TIA 568A/B STANDARD ROHS COMPLIANT	
CABLE LENGTH UNLESS OTHER SPEC. TOLERANCES	
0 - 200mm	± 10 mm
201 - 1000mm	± 20 mm
1001 - 1500mm	± 25 mm
1501 - 2100mm	± 30 mm
> 2100mm	± 40 mm

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com