

USB 3.1 TYPE C MALE TO MINI DISPLAYPORT FEMALE ADAPTER


SKUS U3-CMMDF

FEATURES


- USB 3.1 Type C Male to Mini DisplayPort Adapter 6"
- Use to connect USB-C devices to Mini DisplayPort displays such as a monitor or projector
- Supports high resolution displays up to 4K @ 60Hz
- Compatible with DisplayPort Alternate Mode (DP Alt Mode) USB-C devices
- Mini DisplayPort female end allows you to use your own Mini DisplayPort cable
- Type-C connector reversibility



AVAILABLE COLOUR

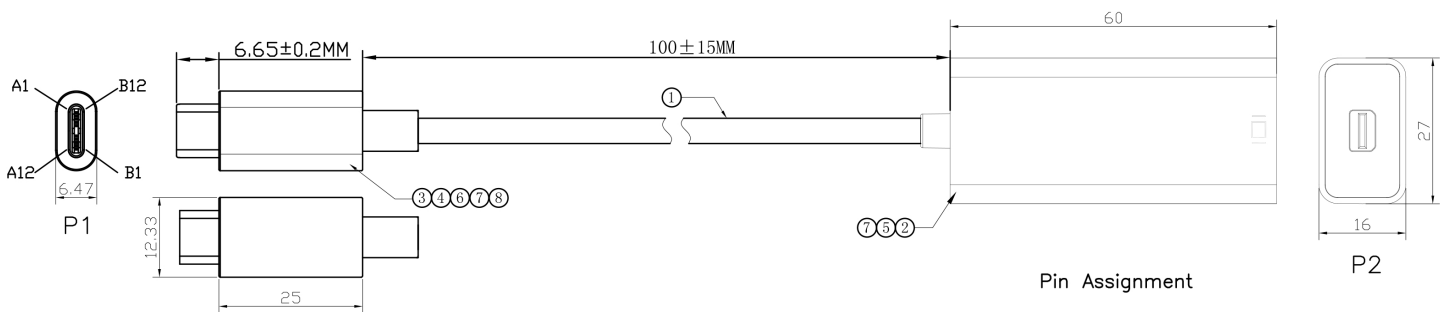

Pin Assignment

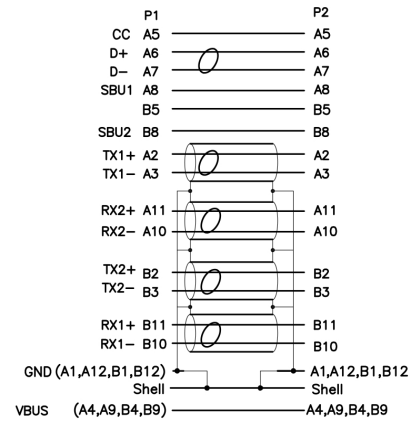

MATERIALS

- | | |
|-----|---|
| (1) | USB 3.1 [34AWG(7/0.06TC)+EAM]*4P+34AW-G(7/0.06TC)*2C+28AWG(7/0.127TC)*2C+34AWG(7/0.06TC)*4C+A B(16/9/0.06TC 75%TC) OD 3.9mm
Colour: White |
| (2) | UTC-MDP01-L with PCB shell nickel plated
IC:FM25F005~TSSOP8 |
| (3) | USC 3.1 Type C connector with PCB nickel plated |
| (4) | USC 3.1 Type C connector with tinplate |
| (5) | UTC-MDP01-L ABS Shell
Colour: White |
| (6) | USB 3.1 Type C ABS Shell
Colour: White |
| (7) | Outside molding: 45P PVC
Colour: White |
| (8) | Inside molding: PE |

SPECIFICATIONS

ROHS COMPLIANT

TOLERANCE

.X ± .30 | .XX ± .10 | .XXX ± .05 (mm)

.X ± .015 | .XX ± 010 | .XXX ± .005 (inches)

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com