

DISPLAYPORT 1.2 TO HDMI M/M CABLE


SKUS	VC-782S	(3')	VC-782L	(10')
	VC-782G	(6')	VC-782E	(15')

FEATURES

- Displayport 1.2 Male to HDMI 1.4 Type A Male Video Cable
- Use to connect a DisplayPort (DP, DP++, DisplayPort++) equipped computer to an HD monitor or projector with HDMI port
- Support HBR bandwidth and resolutions up to 4Kx2K@30Hz
- Deliver high definition audio and video signals from your computer to a monitor for video streaming or gaming
- Latching on the DisplayPort connector provides a secure connection between the adapter and the device port, and assists with strain relief
- Gold-plated connectors for superior transmission, high reliability and durability




AVAILABLE COLOUR

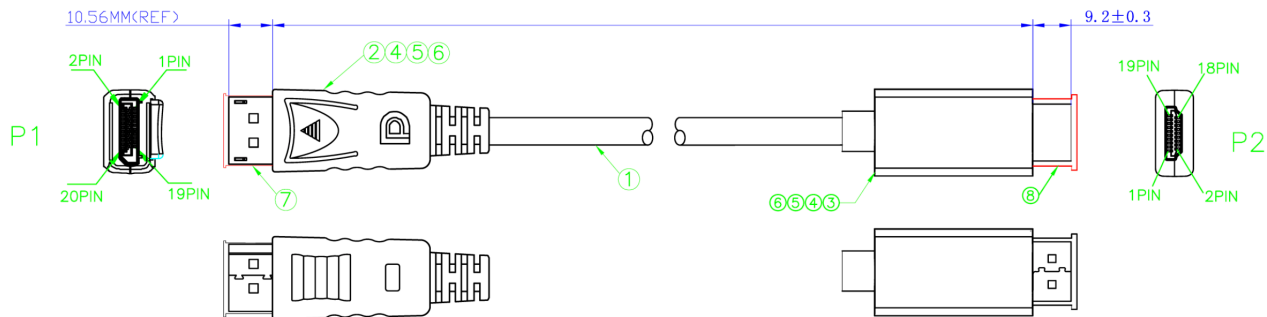

MATERIALS

- | | |
|-----|---|
| (1) | DisplayPort Cable UL20276 [28AWG(7/0.127TC)*1P+D.W+AL+Mylar]*5+28AWG(7/0.127TC)*5C+AL/MY+D.W+BD+Jacket PVC
Colour: Black, OD: 7.3±0.2mm |
| (2) | DisplayPort MALE, Insulation: Black, Pin Gold Plated, Shell Gold Flash, with ABS Plastic Hood |
| (3) | DP to HDMI Converter with HDMI MALE, PCB+SMT, HDMI Pin Gold Flash, Shell Gold Flash |
| (4) | S.R. Molding 45P PVC, Colour: Black |
| (5) | Inside Molding: PE |
| (6) | Copper Foil 360° Solder Type |
| (7) | Dust Cover for DP |
| (8) | Dust Cover for HDMI |

PIN Assignment

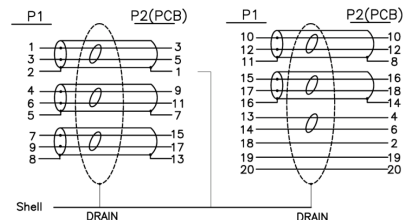

SPECIFICATIONS

ROHS COMPLIANT 100% TESTED (OPEN, SHORT, MISS WIRE)	
TOLERANCE	.X ± 0.30 .XX ± 0.10 .XXX ± 0.05
CONDUCTANCE RESISTANCE	2 ohms (max.)
INSULATION RESISTANCE	10M ohms (min.)
HI-POT	100V DC/10ms

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for a current specs. Please note that all physical specifications are nominal.