

1000' 22AWG 4-CONDUCTOR SECURITY CABLE (FT4/CMG)

SKUS NC-224

FEATURES

- Suitable for connecting intercoms, alarm sensors, keypads, sirens, and power supply in a wide range of applications.
- High-quality copper conductors ensure clean signals and reliable power delivery for installations.
- Easy-to-handle 1000' reel pull boxes for convenient installation.
- UL listed, CM & CSA CMG rated, RoHS Compliant

DESCRIPTION


RATED TEMPERATURE	75°C
RATED VOLTAGE	300 V
PRODUCT STANDARD CERTIFICATION	UL CM & CSA CMG
FLAME TEST	FT4
APPLICATION	Internal wiring or external interconnection of electronic equipment in Class 2 circuits only.
REFERENCE STANDARD	UL 444

COLOUR

INSULATION COMPONENT	1. Red 2. Black 3. Green 4. Yellow
JACKET	White

PERFORMANCE

ELECTRICAL CHARACTERISTICS (20°C)	
MAX. CONDUCTOR DC RESISTANCE (Ω/km)	#22:55.43
MIN. INSULATION RESISTANCE (Ω/m)	PP: 100M
DIELECTRIC STRENGTH	AC-500V/1 Min
MECHANICAL CHARACTERISTICS	
TEST MATERIAL	PVC
MAX. JACKET TENSILE STRENGTH(kgf/mm²)	≥1.05

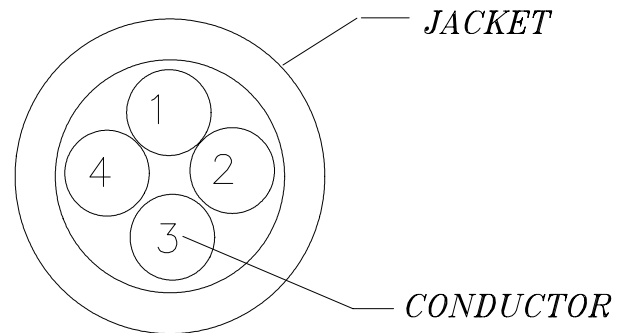

CONSTRUCTION

CONDUCTOR COMPONENT	Solid Bare Copper
AWG	22
CONSTRUCTION (±0.005mm)	1/0.64
SOLID DIA. (mm)	0.64
INSULATION	PP
NOM. THICKNESS (mm)	0.15
INSULATION DIA. (±0.05mm)	0.95
JACKET	PVC
NOM. THICKNESS (mm)	0.36
OUTER DIA. (±0.10mm)	2.97

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com